




HEAVY DUTY FIBERGLASS SUMPS



ANSI/APSP - 16

- ◆ Fast Installation
- ◆ Rough and exterior finish
- ◆ Durable smooth gelcoat interior
- ◆ No forming! No pouring!
- ◆ Premium fiberglass & resin for maximum structural strength
- ◆ Non-metallic - No grounding
- ◆ 2" f.p.t. x f.p.t. for hydro relief valve and pebble pipe
- ◆ "Quick Mount" hardware and sealant included
- ◆ Custom configurations fabricated - Call us today!
- ◆ Optional waterstop flange

Legacy Flange Design

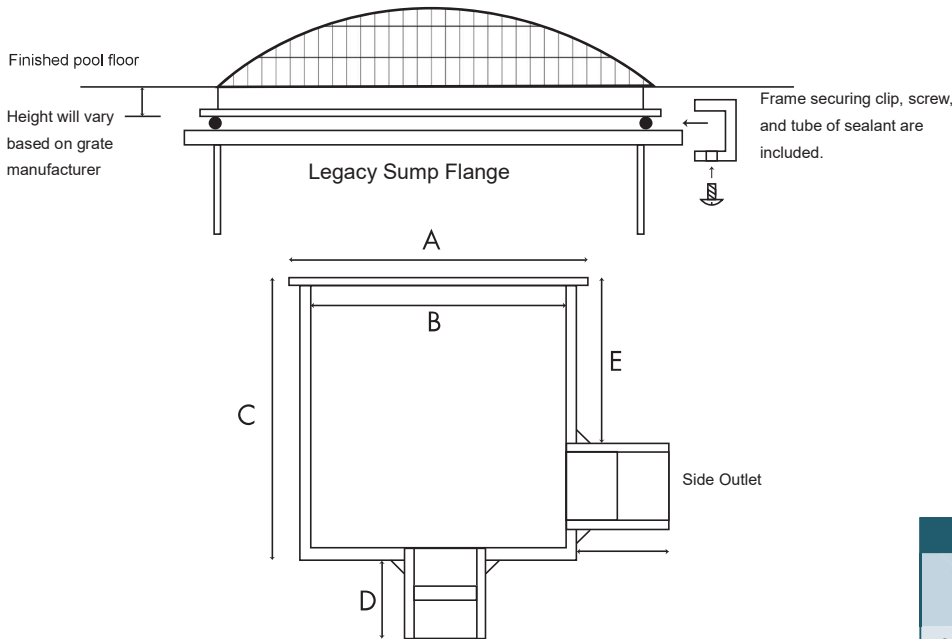

Frames and grates are sold separately

Fiberglass LEGACY SUMP Dimensions								
Sump Sizes & Part #'s	Dimensions (in inches)*					Side Outlet Size f.p.t. x soc	Compatible Grates**	Notes
	A	B	C	D	E			
9" x 9" FPK-50-809	11	9	12	4.5	6.5	3"	List A	1
12" x 12" FPK-50-812-4	14	12	12	4.5	6.5	4"	List B	1
FPK-50-812-6	14	12	18	4.5	10	6"	List B	1
18" x 18" FPK-50-818-6	20	18	20	4.5	10	6"	List C	1
FPK-50-818-24-8	20	18	24	4.5	13.5	8"	List C	1
24" x 24" FPK-50-824-10	27	24	30	4.5	17	10"	List D	2

* See Sump Drawing above for A,B,C,D,E,F measurements

** See Compatible Grate list to right

- ASME A112.19.8a-2008 dimensionally compliant (as an alternative to a field built sump / 2.3.4 Fig 2)
- Sumps with 10" outlets are soc x soc

VGB Compatible Grates*			
Grate Sizes Part #'s	Open Area (sq in).**	Flow Rate** @1.5 ft/sec	Notes
9" x 9" A			
CMP 25508-090	38.9	120 gpm	
640-479XV	43.6	203 gpm	
MLD-FGD-0909	42.12	261 gpm	
WAV9WRxxx	48.4	224 gpm	
12" x 12" B			
WG1032	32.37	256 gpm	
640-472V	62.4	292 gpm	
CMP 25508-12	70.8	232 gpm	
MLD-FGD-1212	81.3	365 gpm	
WAV12WRxxx	90.8	425 gpm	
18" x 18" C			
WG1033	71.25	560 gpm	
CMP 25508-18	155.6	424 gpm	
640-4770V	174.4	812 gpm	
MLD-FGD-1818	183.06	816 gpm	
24" x 24" D			
640-4760V	249.6	1168 gpm	
WAV24101	340.8	1593 gpm	
FLAT24101	352	1531 gpm	1

NOTES:

* Compatible at time of publication and subject to change

** as per manufacturer's printed specifications at time of publication

- Stainless steel frame may require grounding